


WENZHOU KAIXU AUTOMOBILE FITTING CO., LTD


M1302, JB (KX-JB 40-140) (Bevelled ring for bore 孔用倒角挡圈)

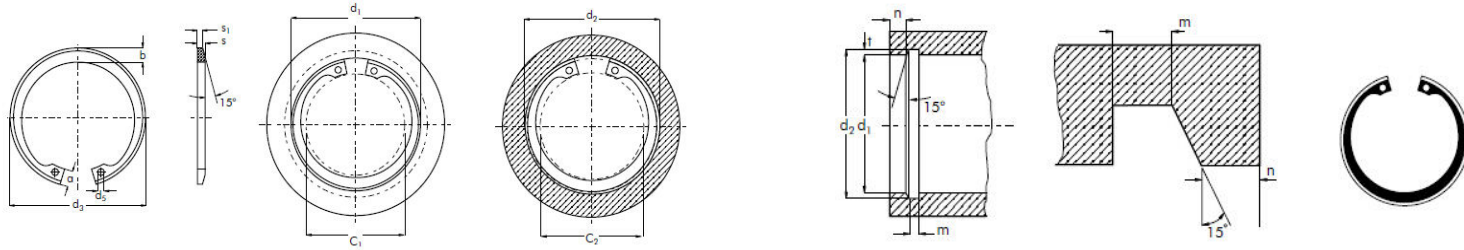

公称直径 d ₁	外径 d ₃		厚度 S		厚度 S ₁		槽直径 d ₂		槽宽		槽内 t	头宽 a max	尾宽 b ≈	孔径 d ₅ min	重量 公斤/千只 ≈
	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	m min	极限偏差					
40	44.0	+0.9, -0.6	1.65	-0.15	1.25	-0.05	42.8	+0.13	1.30	+0.025	1.40	5.3	4.0	1.9	4.05
41	45.8		1.65	-0.15	1.22	-0.05	44.0	+0.13	1.30	+0.025	1.50	5.9	4.0	1.9	4.55
42	46.6		1.65	-0.15	1.22	-0.05	45.0	+0.13	1.30	+0.025	1.50	5.9	4.2	1.9	4.73
43	47.6		1.65	-0.15	1.19	-0.05	46.0	+0.13	1.27	+0.025	1.50	5.9	4.3	1.9	4.91
44	49.3		1.65	-0.15	1.19	-0.05	47.2	+0.13	1.27	+0.025	1.85	6.1	4.3	1.9	4.68
46	51.1		1.65	-0.15	1.19	-0.05	49.4	+0.13	1.27	+0.025	1.70	6.1	4.3	2.3	5.23
47	52.2		1.65	-0.15	1.19	-0.05	50.4	+0.13	1.27	+0.025	1.70	6.1	4.3	2.3	5.82
48	52.6		1.65	-0.15	1.19	-0.05	51.5	+0.13	1.27	+0.025	1.75	6.1	4.3	2.3	5.82
51	56.1		1.65	-0.15	1.15	-0.05	54.6	+0.13	1.22	+0.025	1.80	6.2	4.3	2.3	6.36
52	57.9	+1.0, -0.75	2.05	-0.15	1.50	-0.075	55.7	+0.15	1.65	+0.038	1.85	6.5	4.7	2.3	8.18
54	59.7		2.05	-0.15	1.56	-0.075	57.9	+0.15	1.65	+0.038	1.95	6.7	4.9	2.3	8.82
56	61.3		2.05	-0.15	1.54	-0.075	60.1	+0.15	1.63	+0.038	2.05	6.8	5.0	2.3	8.91
57	63.2		2.05	-0.15	1.54	-0.075	61.5	+0.15	1.63	+0.038	2.25	7.0	5.2	2.3	9.91
60	66.8		2.05	-0.15	1.51	-0.075	64.5	+0.15	1.60	+0.038	2.25	7.0	5.3	2.3	10.55
62	68.6		2.05	-0.15	1.48	-0.075	66.5	+0.15	1.57	+0.038	2.25	7.2	5.2	2.7	11.54
63	70.5		2.05	-0.15	1.48	-0.075	67.7	+0.15	1.57	+0.038	2.35	7.2	5.3	2.7	11.59
65	72.2		2.45	-0.15	1.88	-0.1	69.8	+0.15	1.98	+0.038	2.40	7.5	5.6	2.7	15.45
67	73.9		2.45	-0.15	1.85	-0.1	71.9	+0.15	1.96	+0.038	2.45	7.5	5.7	2.7	15.68
68	75.7		2.45	-0.15	1.85	-0.1	73.1	+0.15	1.96	+0.038	2.55	7.7	6.0	2.7	15.91
70	77.5	+1.4, -1.4	2.45	-0.15	1.83	-0.1	75.2	+0.15	1.93	+0.038	2.60	7.7	5.9	2.7	16.14
72	79.3		2.45	-0.15	1.83	-0.1	77.3	+0.15	1.93	+0.038	2.65	7.7	5.8	2.7	16.36
78	86.8		2.85	-0.15	2.15	-0.13	83.7	+0.15	2.26	+0.051	2.85	8.1	6.5	3.1	24.09
80	89.5		2.85	-0.15	2.15	-0.13	86.0	+0.15	2.26	+0.051	3.00	8.1	6.7	3.1	25.19
82	92.0		2.85	-0.15	2.15	-0.13	88.1	+0.15	2.26	+0.051	3.05	8.9	6.8	3.1	27.27
85	94.8		2.85	-0.15	2.15	-0.13	91.2	+0.15	2.26	+0.051	3.10	8.9	7.0	3.1	29.55

WENZHOU KAIXU AUTOMOBILE FITTING CO., LTD

M1302, JB (KX-JB 40-140) (Bevelled ring for bore孔用倒角挡圈)

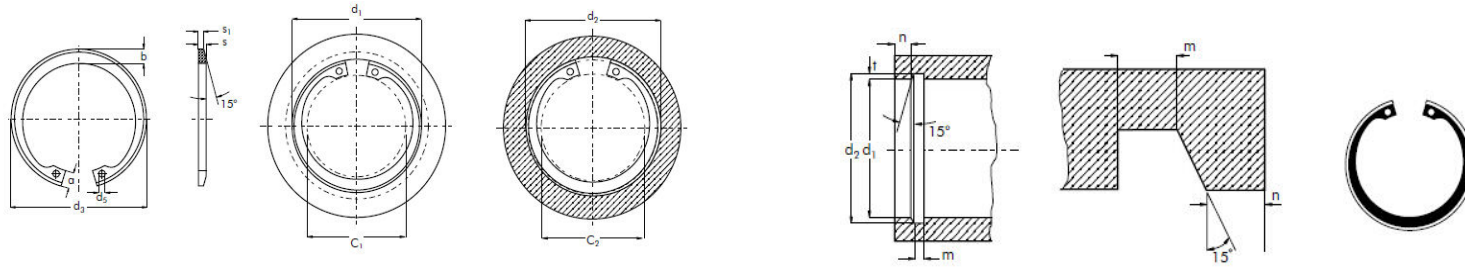

公称直径 d ₁	外径 d ₃		厚度 S		厚度 S1		槽直径 d ₂		槽宽		槽内t	头宽 a max	尾宽 b ≈	孔径 d ₅ min	重量 公斤/千只 ≈
	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	基本尺寸	极限偏差	m min	极限偏差					
88	98.0	+1.4, -1.4	2.85	-0.15	2.15	-0.13	94.6	+0.15	2.26	+0.051	3.30	8.9	7.4	3.1	31.36
90	100.0		2.85	-0.15	2.15	-0.13	96.8	+0.15	2.26	+0.051	3.40	8.9	7.4	3.1	32.73
92	102.2		2.85	-0.15	2.15	-0.13	99.0	+0.15	2.26	+0.051	3.50	8.9	7.7	3.1	33.18
95	105.6	+1.65, -1.65	2.85	-0.15	2.15	-0.13	102.1	+0.15	2.26	+0.051	3.55	8.9	7.8	3.1	35.45
98	109.0		2.85	-0.15	2.15	-0.13	105.5	+0.15	2.26	+0.051	3.75	9.6	8.1	3.1	39.55
100	110.7		2.85	-0.15	2.15	-0.13	107.6	+0.15	2.26	+0.051	3.80	9.6	8.1	3.1	40.00
102	112.4		2.85	-0.15	2.15	-0.13	109.7	+0.15	2.26	+0.051	3.85	9.6	8.4	3.1	42.27
105	115.8		2.85	-0.15	2.15	-0.13	112.8	+0.15	2.26	+0.051	3.90	9.6	8.4	3.1	44.09
108	119.2		2.85	-0.15	2.15	-0.13	116.1	+0.15	2.26	+0.051	4.05	9.6	8.5	3.1	45.91
110	120.8		2.85	-0.15	2.15	-0.13	118.0	+0.15	2.26	+0.051	4.00	10.5	8.6	3.8	47.73
115	125.5		2.85	-0.15	2.15	-0.13	123.2	+0.15	2.26	+0.051	4.10	10.5	8.9	3.8	50.45
118	128.9		2.85	-0.15	2.15	-0.13	126.3	+0.15	2.26	+0.051	4.15	10.5	8.9	3.8	53.18
120	132.4		2.85	-0.15	2.15	-0.13	128.6	+0.15	2.26	+0.051	4.30	10.5	9.1	3.8	56.36
127	139.3	2.85	-0.15	2.15	-0.13	135.8	+0.15	2.26	+0.051	4.40	11.3	9.9	3.8	61.82	
140	154.1	3.25	-0.2	2.49	-0.15	149.2	+0.15	2.29	+0.051	4.60	11.8	10.4	3.8	83.18	