


WENZHOU KAI XU AUTOMOBILE FITTING CO., LTD


(KX-MSP30-190) (SNAP RING FOR ROLLER BEARING 滚柱轴承卡环)

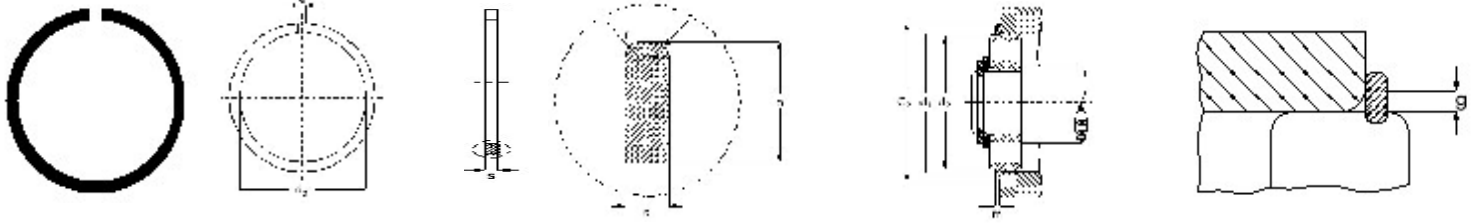

| 公称直径 d ₁ | 厚度 S | | b | | d ₃ | | e ≈ | r min | d ₂ | | 槽宽 m min | c ₂ | 重量 Kg/1000 ≈ | | |
|------------------------|-------|-------|------|-------|----------------|------|--------|----------|----------------|-------|----------------|----------------|--------------------|------|------|
| | 基本尺寸 | 极限偏差 | 基本尺寸 | 极限偏差 | 基本尺寸 | 极限偏差 | | | 基本尺寸 | 极限偏差 | | | | | |
| 30 | 1.12 | -0.1 | 3.25 | | 27.40 | +0.4 | 3 | 0.40 | 28.17 | -0.25 | 1.35 | 34.7 | 2.80 | | |
| 32 | | | | | 29.40 | | | | 30.15 | | | 36.7 | 3.00 | | |
| 35 | | | | | 32.40 | | | | 33.17 | | | 39.7 | 3.20 | | |
| 37 | | | | | 34.00 | | | | 34.77 | | | 41.3 | 3.40 | | |
| 40 | | | | | 37.30 | | | | 38.10 | | | 44.6 | 3.60 | | |
| 42 | | | | | 38.90 | | | | 39.75 | | | 46.3 | 3.80 | | |
| 44 | | | 4.04 | | -0.15 | | 40.90 | | +0.5 | | | 4 | 41.75 | 48.3 | 4.00 |
| 47 | | | | | | | 43.70 | | | | | | 44.60 | 52.7 | 5.30 |
| 50 | | | | | | | 46.60 | | | | | | 47.60 | 55.7 | 5.80 |
| 52 | | | | | | | 48.80 | | | | | | 49.73 | 57.9 | 5.90 |
| 55 | | | | | | | 51.70 | | | | | | 52.60 | 60.7 | 6.20 |
| 56 | | | | | | | 52.40 | | | | | | 53.60 | 61.7 | 6.50 |
| 58 | | | | | | | 54.40 | | | | | | 55.60 | 63.7 | 6.70 |
| 62 | | | | | | | 1.70 | | | | | | -0.1 | 4.85 | |
| 65 | 61.20 | 62.60 | 70.7 | 11.00 | | | | | | | | | | | |
| 68 | 63.40 | 64.82 | 74.6 | 12.60 | | | | | | | | | | | |
| 72 | 67.40 | 68.81 | 78.6 | 14.70 | | | | | | | | | | | |
| 75 | 70.40 | 71.83 | 81.6 | 15.30 | | | | | | | | | | | |
| 80 | 75.40 | 76.81 | 86.6 | 16.30 | | | | | | | | | | | |
| 85 | 2.46 | | 7.21 | | 80.40 | +1.0 | 7 | 81.81 | | 3.10 | 91.6 | 17.50 | | | |
| 90 | | | | | 85.40 | | | 86.79 | | | 96.5 | 26.60 | | | |
| 95 | | | | | 90.40 | | | 91.82 | | | 101.6 | 28.20 | | | |
| 100 | | | | | 95.20 | | | 96.80 | | | 106.5 | 29.20 | | | |
| 110 | | | | | 105.20 | | | 106.81 | | | 116.6 | 32.80 | | | |
| 115 | | | | | 110.20 | | | 111.81 | | | 121.6 | 34.40 | | | |
| 120 | 2.82 | | 9.60 | | 113.60 | +1.6 | 10 | 115.21 | | 3.50 | 129.7 | 60.60 | | | |
| 125 | | | | | 118.60 | | | 120.22 | | | 134.7 | 63.00 | | | |
| 130 | | | | | 123.60 | | | 125.22 | | | 139.7 | 65.60 | | | |
| 140 | | | | | 133.00 | | | 135.23 | | | 149.7 | 70.60 | | | |
| 145 | | | | | 138.00 | | | 140.23 | | | 154.7 | 73.00 | | | |
| 150 | | | | | 142.90 | | | 145.24 | | | 159.7 | 77.20 | | | |
| 160 | 3.10 | | | | 152.90 | +1.8 | | 155.22 | | | 169.7 | 81.00 | | | |
| 170 | | | | | 161.30 | | | 163.65 | | | 182.9 | 122.00 | | | |
| 180 | | | | | 171.20 | | | 173.66 | | | 192.9 | 128.00 | | | |
| 190 | | | | | 181.00 | | | 183.64 | | | 202.9 | 139.00 | | | |

WENZHOU KAI XU AUTOMOBILE FITTING CO., LTD

(KX-MSP200-400) (SNAP RING FOR ROLLER BEARING 滚柱轴承卡环)

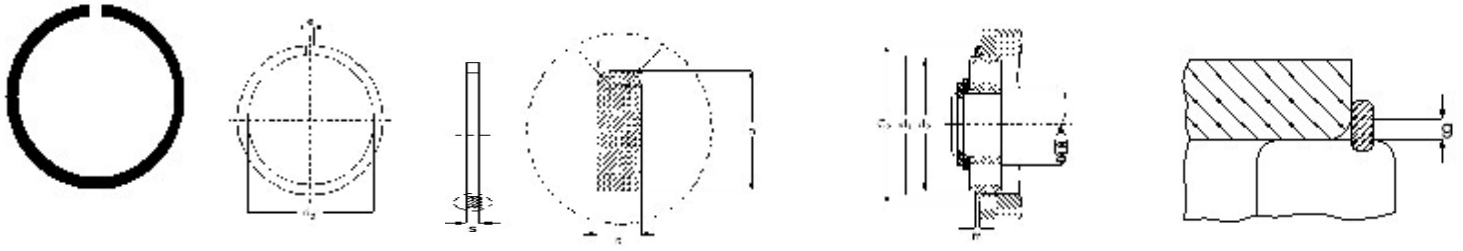

| 公称直径 d ₁ | 厚度 S | | b | | d ₃ | | e ≈ | r _{min} | d ₂ | | 槽宽 m _{min} | c ₂ | 重量 Kg/1000 ≈ |
|------------------------|-------|--------|-------|-------|----------------|------|--------|------------------|----------------|-------|---------------------|----------------|--------------------|
| | 基本尺寸 | 极限偏差 | 基本尺寸 | 极限偏差 | 基本尺寸 | 极限偏差 | | | 基本尺寸 | 极限偏差 | | | |
| 200 | 3.10 | | 9.60 | | 191.0 | | 10 | 0.70 | 193.65 | | 3.50 | 212.90 | 148.00 |
| 210 | | | | | 200.9 | | | | 203.60 | | | | |
| 215 | | | | | 205.9 | | | | 208.60 | | | | |
| 225 | 3.50 | -0.1 | 10.00 | -0.15 | 214.3 | +1.8 | 10 | 1.20 | 217.00 | -0.50 | 4.50 | 237.00 | 196.00 |
| 230 | | | | | 219.2 | | | | 222.00 | | | | |
| 240 | | | | | 229.2 | | | | 232.00 | | | | |
| 250 | | | | | 239.2 | | | | 242.00 | | | | |
| 260 | | | | | 247.5 | | | | 252.00 | | | | |
| 270 | | | | | 257.5 | | | | 262.00 | | | | |
| 280 | 4.50 | -0.2 | 12.00 | -0.30 | 267.5 | +2.5 | 10 | 1.50 | 272.00 | -0.50 | 5.50 | 292.00 | 250.00 |
| 290 | | | | | 277.5 | | | | 282.00 | | | | |
| 300 | | | | | 284.5 | | | | 290.00 | | | | |
| 310 | | | | | 294.0 | | | | 300.00 | | | | |
| 320 | | | | | 304.0 | | | | 310.00 | | | | |
| 340 | | | | | 324.0 | | | | 330.00 | | | | |
| 360 | | | | | 343.0 | | | | 350.00 | | | | |
| 370 | | | | | 353.0 | | | | 360.00 | | | | |
| 380 | 363.0 | 370.00 | | | | | | | | | | | |
| 400 | | | | | 383.0 | +3.0 | 10 | 1.50 | | -0.50 | 5.50 | 394.00 | 500.00 |
| 400 | | | | | 383.0 | | | | | | | | |

